


# Retrofit System for Roof Pitched Internally Fitted

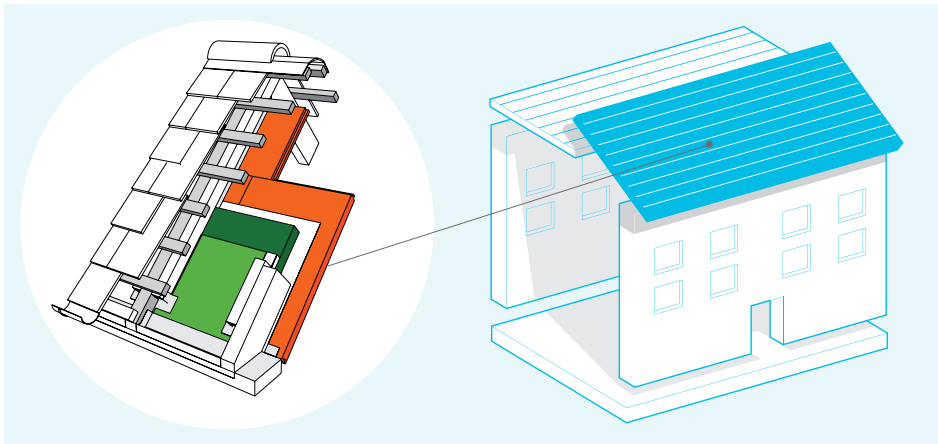

## System Performance


u - values 0.30 - 0.10

y - values 0.05 - 0.02

airtightness 5 - 0.6 @50pa

The system complies with the most stringent of standards - from baseline building regulations through to Passivhaus. The system is suitable for most internal finishing options including lime plaster, clay plaster or plaster board finish. All components for the system are available from NBT.


## Cross-section of system

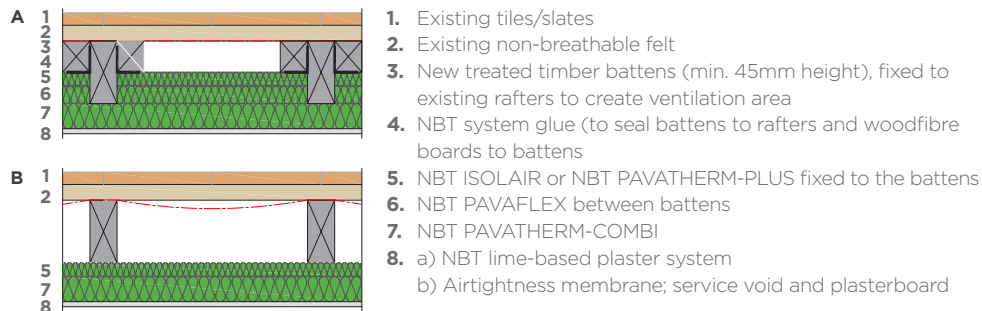

## How NBT systems compare to standard build



# Components & Accessories for NBT System for internally Fitted Roof: Pitched

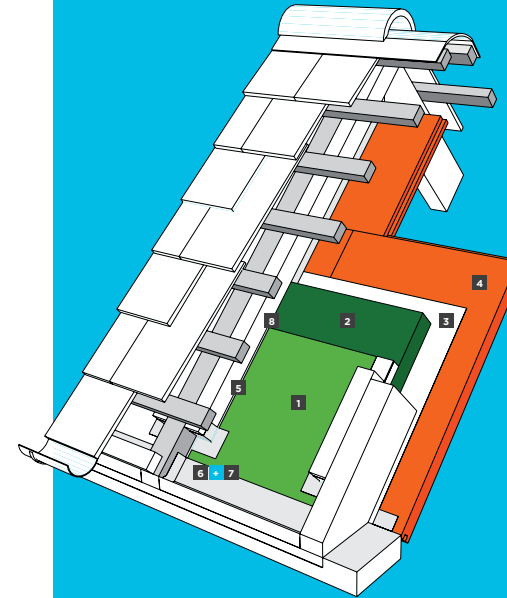

<b>1</b> P6,8 Pavatherm-Plus* or Isolair	<b>2</b> P16 Pavaflex
<b>3</b> P17 NBT Airtightness membrane	<b>4</b> P7 Pavatherm-Combi
<b>5</b> P20 Pavaflex PAVACOLL 310 adhesive	<b>6</b> P18 Pavatape 150
<b>7</b> P19 Pavabase Primer	<b>8</b> P23 Ejot: TKR

\* Please refer to [www.natural-building.co.uk](http://www.natural-building.co.uk) or the contents page of this pack to find more information about the range of NBT products

System build up

