




IndiTherm®

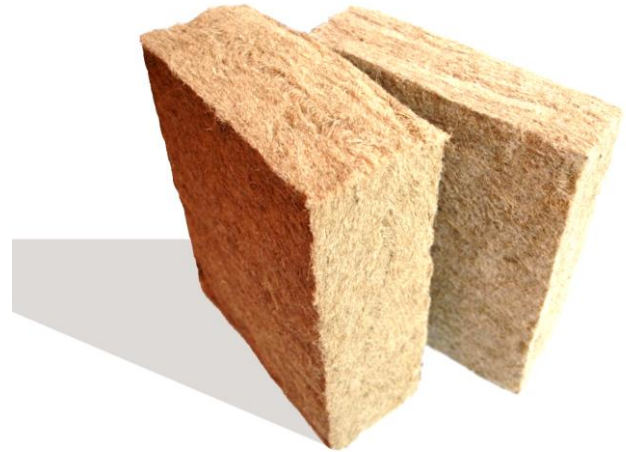

Declaration of Performance

	Standard	Performance	Notes
Durability	BS 5250:2011 + A1:2016	No physical transformation or loss of thermal performance.	Code of practice for control of condensation in buildings. Product exposed to extreme T and RH in climate chamber.
Thermal Conductivity	BS ISO 9869 - 1:2014	0.040 W/mK	Measured thermal conductivity
Vapour Permeability		2	
Fire Rating		E	Euroclass fire rating.
Bulk Density		45 kg/m ³	
Specific Heat Capacity		2100 J/(kg.K)	